

EasyPrint *eco*

Intermittent Motion Thermal Transfer Printer



The **EasyPrint *eco*** provides the highest quality thermal transfer printing for all intermittent motion packaging machines, baggers, and labelers.

The **EasyPrint *eco*** delivers high-quality, variable coding and printing, company logos, real time and bar codes on all flexible films, Tyvek, labels, cartons and foils.

The **EasyPrint *eco*** offers programmable flexibility to eliminate costly preprinted web and labels.

All EasyPrint Thermal Printers utilize our unique ribbon saving feature resulting in the lowest cost per print.

Features:


- 2" X 4" print area.
- Brackets available for all packaging machinery.
- Our VersaStyle software makes it easy to create labels.
- Fast real-time variable calculation / update times.
- Fast communication via USB or Ethernet.
- Compact size and cassette design make for easy installation and service.
- Unique ribbon saving feature is software controlled resulting in the lowest ribbon cost per print.



Printer Control Box

EasyPrint *eco* Specifications

- | | |
|------------------|--|
| • Technology | Direct Thermal Transfer |
| • Print Area | 2in X 4in |
| • Print Speed | 600mm/sec |
| • Print Density | 300DPI (12 dots/mm) |
| • Graphic Logos | BMP, DXF, PCX, TIF, WMF, GIF. |
| • Bar Codes | EAN 13, EAN 8, Code 39, 2/5 interleave, UPC A, UPC E, Code 128, EAN 128, HIBC LIC 128, PZN, EAN add-on, Date Code. |
| • Time/Date | Yes |
| • Memory Storage | PCMCIA or PC |
| • Ribbon Length | 1312 ft. (400m) |
| • Communication | Serial RS 232, Parallel DB25, USB, Ethernet |
| • Temperature | 41°F-104°F (5°C-40°C) |
| • Electrical | 115/230 VAC, 50/60Hz, 300VAC |
| • Compressed Air | .353 CFM @ 88PSI, MAX (10LT/min @ 6 BAR) |

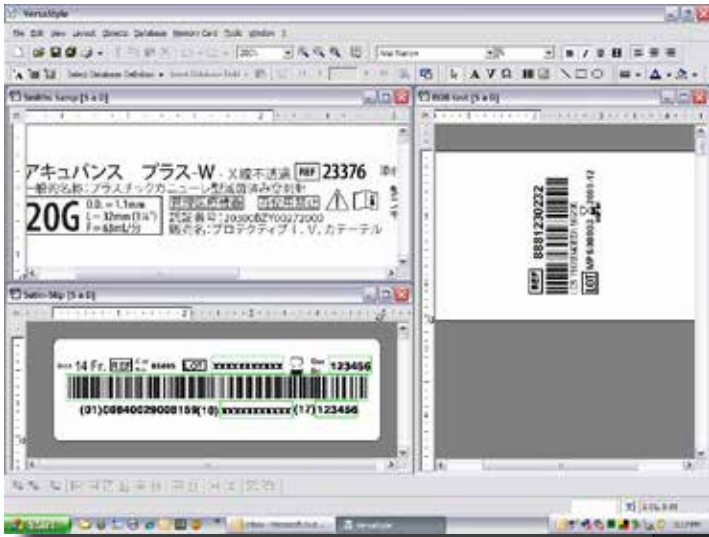

Simple to use GUI for label design

- ✓ **SELL BY DATES**
- ✓ **LOT NUMBERS**
- ✓ **BAR CODES**
- ✓ **NUTRITIONAL FACTS**

**PRINT IN LINE,
DIRECTLY ONTO
PACKAGING MATERIAL**

